
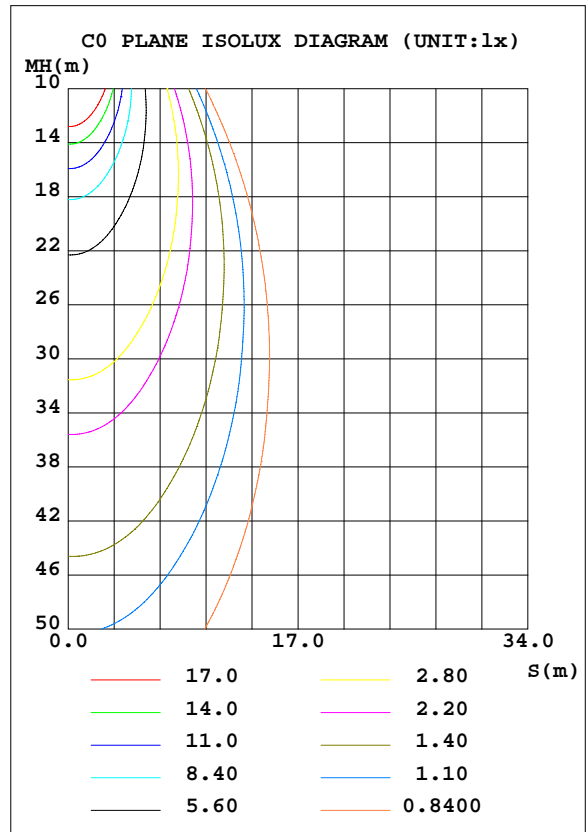


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LL-F2010T-I-18W-2010TP71000 25x45°	TYPE:IES	WEIGHT:
SPEC.:	DIM.: 1M	SERIAL No.:
MFR.:	SUR.:0.015X1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.54 lm/W			
MODEL		Imax(cd)	2786	S/MH(C0/180)	0.64
NOMINAL POWER(W)	18.9216	LOR(%)	100.0	S/MH(C90/270)	0.34
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1617.7	η UP, DN(C0-180)	1.6,54.2
NOMINAL FLUX(lm)	1617.69	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7,42.5
LAMPS INSIDE	1	η up(%)	3.3	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	24	η down(%)	96.7	CIBSE SHR MAX	0.50

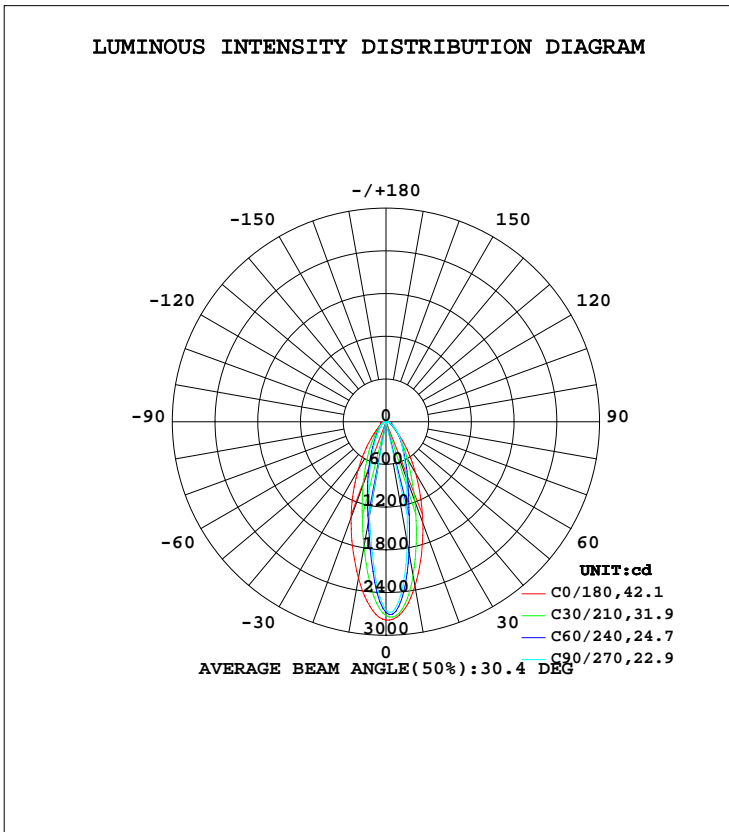

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Sun ren fang
 Test Date:2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.818m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2345	2030	1723	1951	2229	1561	1346	1556	0- 10	208.7	208.7	12.9,12.9
20	1516	995.5	842.1	950.7	1434	794.3	642.5	798.9	10- 20	372.4	581.2	35.9,35.9
30	835.3	538.1	485.0	526.2	785.5	395.3	303.7	399.3	20- 30	328.3	909.5	56.2,56.2
40	388.2	302.2	316.3	301.2	362.9	198.8	157.4	200.3	30- 40	235.5	1145	70.8,70.8
50	167.4	172.4	190.7	175.3	163.8	111.4	97.83	112.1	40- 50	155.0	1300	80.4,80.4
60	94.12	101.6	107.3	104.9	95.20	71.63	65.17	72.55	50- 60	102.4	1402	86.7,86.7
70	79.79	63.39	62.46	65.37	75.20	48.77	45.19	47.00	60- 70	71.57	1474	91.1,91.1
80	79.00	41.03	41.12	41.06	73.50	32.34	29.24	29.36	70- 80	54.24	1528	94.5,94.5
90	16.60	24.74	24.48	24.38	18.13	18.24	17.95	16.68	80- 90	36.87	1565	96.7,96.7
100	1.588	11.30	15.81	10.57	1.103	8.872	13.84	9.005	90-100	15.23	1580	97.7,97.7
110	1.695	7.083	11.79	6.754	1.375	6.027	10.88	6.652	100-110	8.114	1588	98.2,98.2
120	2.451	3.289	7.058	3.463	2.116	3.400	7.700	4.355	110-120	5.192	1594	98.5,98.5
130	3.931	2.643	3.838	2.634	3.748	3.496	5.743	4.048	120-130	3.457	1597	98.7,98.7
140	6.481	4.298	3.792	4.241	6.976	6.185	6.191	5.791	130-140	3.427	1600	98.9,98.9
150	10.06	7.666	6.226	7.567	12.20	10.70	9.174	10.09	140-150	4.443	1605	99.2,99.2
160	14.69	13.06	10.86	12.49	18.89	17.54	16.70	17.15	150-160	5.461	1610	99.5,99.5
170	20.04	19.51	17.53	17.34	25.07	24.23	26.47	24.63	160-170	5.106	1615	99.9,99.9
180	26.37	25.67	26.56	25.64	26.75	25.58	26.70	25.59	170-180	2.230	1618	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1230.9 lm

%lum = 76.1%
%lamp = 76.1%

Conical surface Flux(120deg): 1402.4 lm


%lum = 86.7%
%lamp = 86.7%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Sun ren fang
Test Date:2021-08-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:12.818m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME : LL-F2010T-I-18W-2010TP71000 25x45°	TYPE:IES	WEIGHT:
SPEC.:	DIM.: 1M	SERIAL No.:
MFR.:	SUR.:0.015X1	Shielding Angle:

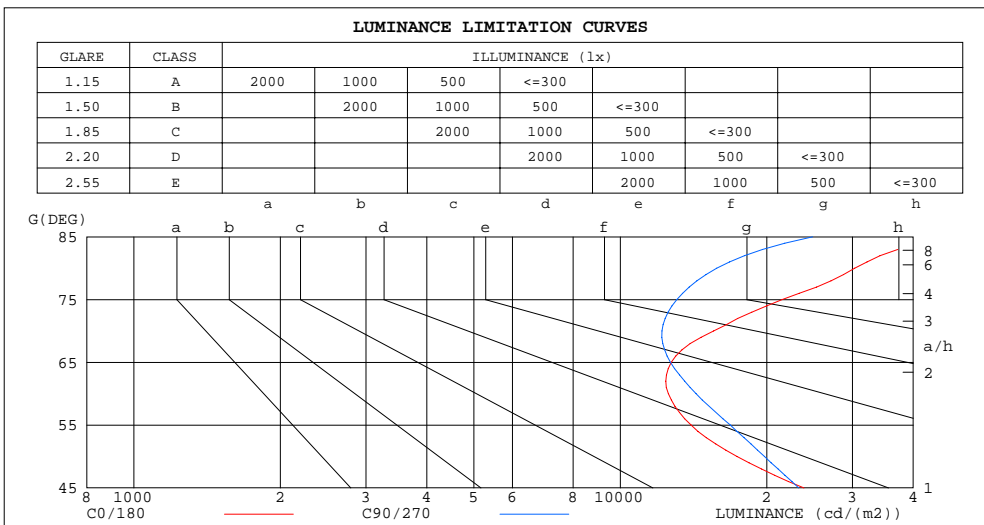

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	44087	24843
80	30329	15786
75	21519	13066
70	15553	12175
65	12724	12674
60	12550	14311
55	13975	16826
50	17363	19778
45	23845	23258

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Sun ren fang
 Test Date:2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.818m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: : LL-F2010T-I-18W-2010TP71000 25x45°	TYPE:IES	WEIGHT:
SPEC.:	DIM.: 1M	SERIAL No.:
MFR.:	SUR.:0.015X1	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.240	.137	.043	.233	.133	.042	.218	.125	.040	.204	.118	.038	.192	.111	.036	
2.0	.220	.120	.037	.213	.117	.036	.200	.111	.035	.188	.106	.033	.178	.100	.032	
3.0	.202	.108	.032	.197	.105	.032	.185	.100	.031	.175	.096	.029	.166	.092	.028	
4.0	.188	.097	.029	.182	.095	.028	.173	.092	.027	.164	.088	.026	.155	.084	.026	
5.0	.175	.089	.026	.170	.087	.025	.162	.084	.025	.153	.081	.024	.146	.078	.023	
6.0	.164	.082	.023	.159	.081	.023	.152	.078	.023	.145	.075	.022	.138	.073	.022	
7.0	.154	.076	.022	.150	.075	.021	.143	.072	.021	.137	.070	.020	.131	.068	.020	
8.0	.145	.071	.020	.142	.070	.020	.135	.068	.019	.130	.066	.019	.124	.064	.019	
9.0	.137	.066	.018	.134	.065	.018	.128	.063	.018	.123	.062	.018	.118	.060	.017	
10.0	.130	.062	.017	.127	.061	.017	.122	.060	.017	.117	.058	.017	.113	.057	.016	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.215	.215	.215	.184	.184	.184	.126	.126	.126	.072	.072	.072	.023	.023	.023	
1.0	.201	.182	.165	.172	.156	.142	.117	.107	.098	.068	.062	.057	.022	.020	.018	
2.0	.188	.157	.132	.161	.136	.114	.110	.094	.080	.064	.055	.047	.020	.018	.015	
3.0	.177	.139	.109	.152	.120	.095	.104	.083	.066	.060	.049	.039	.019	.016	.013	
4.0	.167	.125	.093	.143	.108	.081	.099	.075	.057	.057	.044	.034	.018	.014	.011	
5.0	.159	.114	.081	.136	.099	.070	.094	.069	.050	.054	.040	.029	.018	.013	.010	
6.0	.151	.105	.072	.130	.091	.063	.089	.064	.044	.052	.037	.026	.017	.012	.009	
7.0	.144	.098	.065	.124	.085	.057	.086	.059	.040	.050	.035	.024	.016	.011	.008	
8.0	.138	.091	.060	.119	.079	.052	.082	.056	.037	.048	.033	.022	.015	.011	.007	
9.0	.132	.086	.055	.114	.075	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
10.0	.127	.082	.052	.110	.071	.045	.076	.050	.032	.044	.030	.019	.014	.010	.006	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Sun ren fang
 Test Date:2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.818m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME:: LL-F2010T-I-18W-2010TP71000 25x45°		TYPE:IES					WEIGHT:				
SPEC.:		DIM.: 1M					SERIAL No.:				
MFR.:		SUR.:0.015X1					Shielding Angle:				
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		18.7	19.8	19.0	20.0	20.3	18.9	20.0	19.2	20.2	20.5
	3H	19.9	20.9	20.2	21.2	21.4	19.9	20.9	20.2	21.2	21.4
	4H	20.9	21.9	21.3	22.2	22.5	20.4	21.4	20.8	21.7	22.0
	6H	22.5	23.4	22.8	23.7	24.0	21.1	22.0	21.4	22.3	22.6
	8H	23.3	24.2	23.7	24.5	24.8	21.4	22.3	21.8	22.6	23.0
	12H	24.1	25.0	24.5	25.3	25.7	21.9	22.7	22.3	23.1	23.4
	4H 2H	19.1	20.0	19.4	20.3	20.6	19.2	20.2	19.5	20.5	20.8
	3H	20.5	21.3	20.8	21.6	22.0	20.4	21.3	20.8	21.6	22.0
	4H	21.7	22.4	22.1	22.8	23.2	21.2	22.0	21.6	22.3	22.7
	6H	23.4	24.1	23.8	24.5	24.9	22.0	22.7	22.5	23.1	23.5
	8H	24.4	25.0	24.8	25.4	25.9	22.5	23.2	23.0	23.6	24.0
	12H	25.4	26.0	25.8	26.4	26.9	23.1	23.7	23.6	24.1	24.6
	8H 4H	21.9	22.5	22.3	23.0	23.4	21.5	22.1	21.9	22.5	23.0
	6H	23.8	24.3	24.3	24.8	25.3	22.6	23.1	23.1	23.6	24.0
	8H	24.9	25.4	25.4	25.9	26.4	23.2	23.7	23.7	24.2	24.7
	12H	26.2	26.6	26.7	27.1	27.7	24.0	24.4	24.5	24.9	25.5
	12H 4H	21.9	22.5	22.4	23.0	23.4	21.6	22.1	22.0	22.6	23.0
	6H	23.9	24.4	24.4	24.8	25.3	22.7	23.2	23.2	23.7	24.2
	8H	25.1	25.5	25.6	26.0	26.5	23.5	23.9	24.0	24.4	24.9
Variations with the observer position at spacings:											
S = 1.0H		+ 0.3 / - 0.3					+ 0.3 / - 0.3				
1.5H		+ 0.4 / - 0.3					+ 0.1 / - 0.2				
2.0H		+ 0.3 / - 0.3					+ 0.4 / - 0.4				

CIE Pub.117, 1618 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.7)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Sun ren fang
 Test Date:2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.818m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: : LL-F2010T-I-18W-2010TP71000 25x45°	TYPE:IES	WEIGHT:
SPEC.:	DIM.: 1M	SERIAL No.:
MFR.:	SUR.:0.015X1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	74	65	60	73	65	60	72	64	59	55
0.80	82	74	68	81	73	68	79	72	68	62
1.00	88	80	75	87	79	74	85	79	74	68
1.25	93	85	80	92	85	80	89	83	79	73
1.50	97	90	84	95	89	84	92	87	83	76
2.00	101	95	90	99	93	89	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	82
3.00	106	101	97	104	99	95	100	96	93	85
4.00	109	105	101	106	103	99	102	99	96	87
5.00	111	107	104	108	105	102	103	101	99	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Sun ren fang
 Test Date:2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.818m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: : LL-F2010T-I-18W-2010TP71000 25x45°	TYPE:IES	WEIGHT:
SPEC.:	DIM.: 1M	SERIAL No.:
MFR.:	SUR.:0.015X1	Shielding Angle:

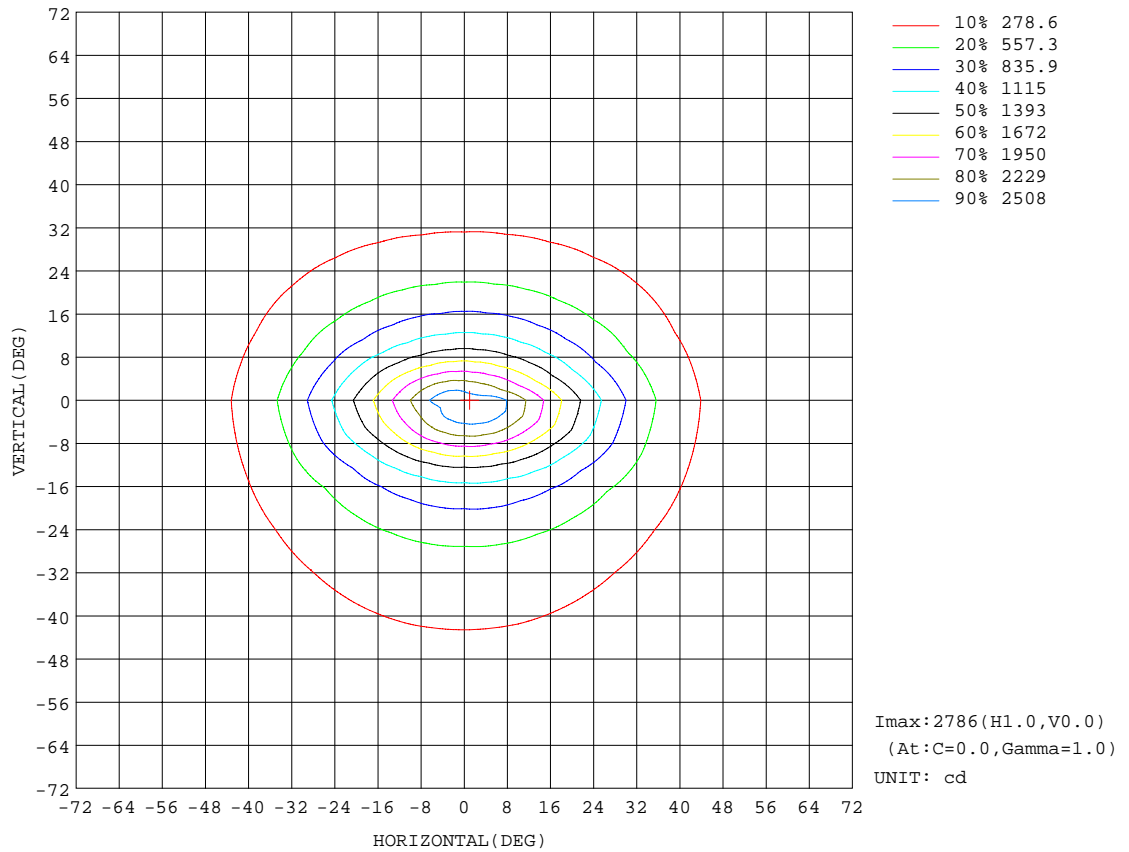


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Sun ren fang
 Test Date: 2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 12.818m [K=1.0000]
 Remarks:

AAI Figure

NAME: : LL-F2010T-I-18W-2010TP71000 25x45°	TYPE:IES	WEIGHT:
SPEC.:	DIM.: 1M	SERIAL No.:
MFR.:	SUR.:0.015X1	Shielding Angle:

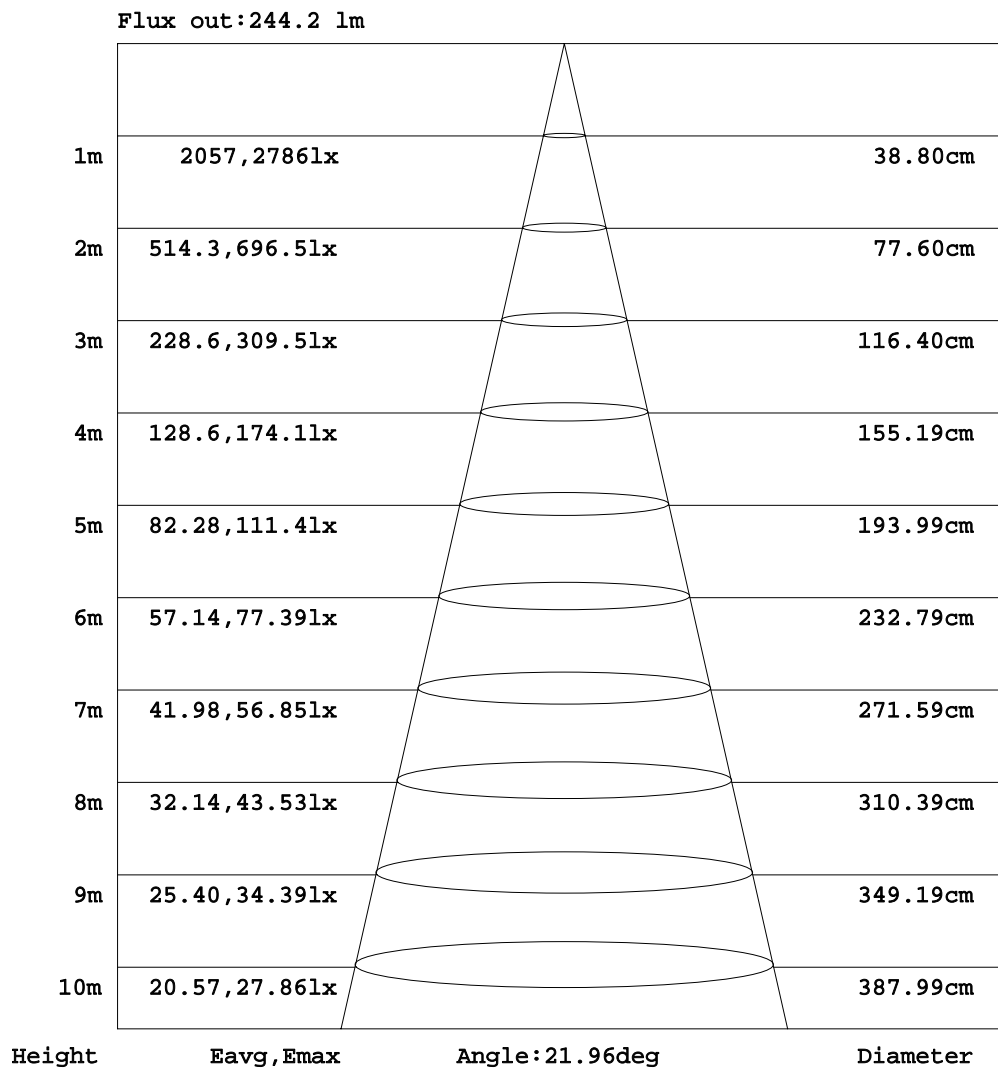


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Sun ren fang
 Test Date:2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.818m [K=1.0000]
 Remarks:

Planar Illuminance Curve

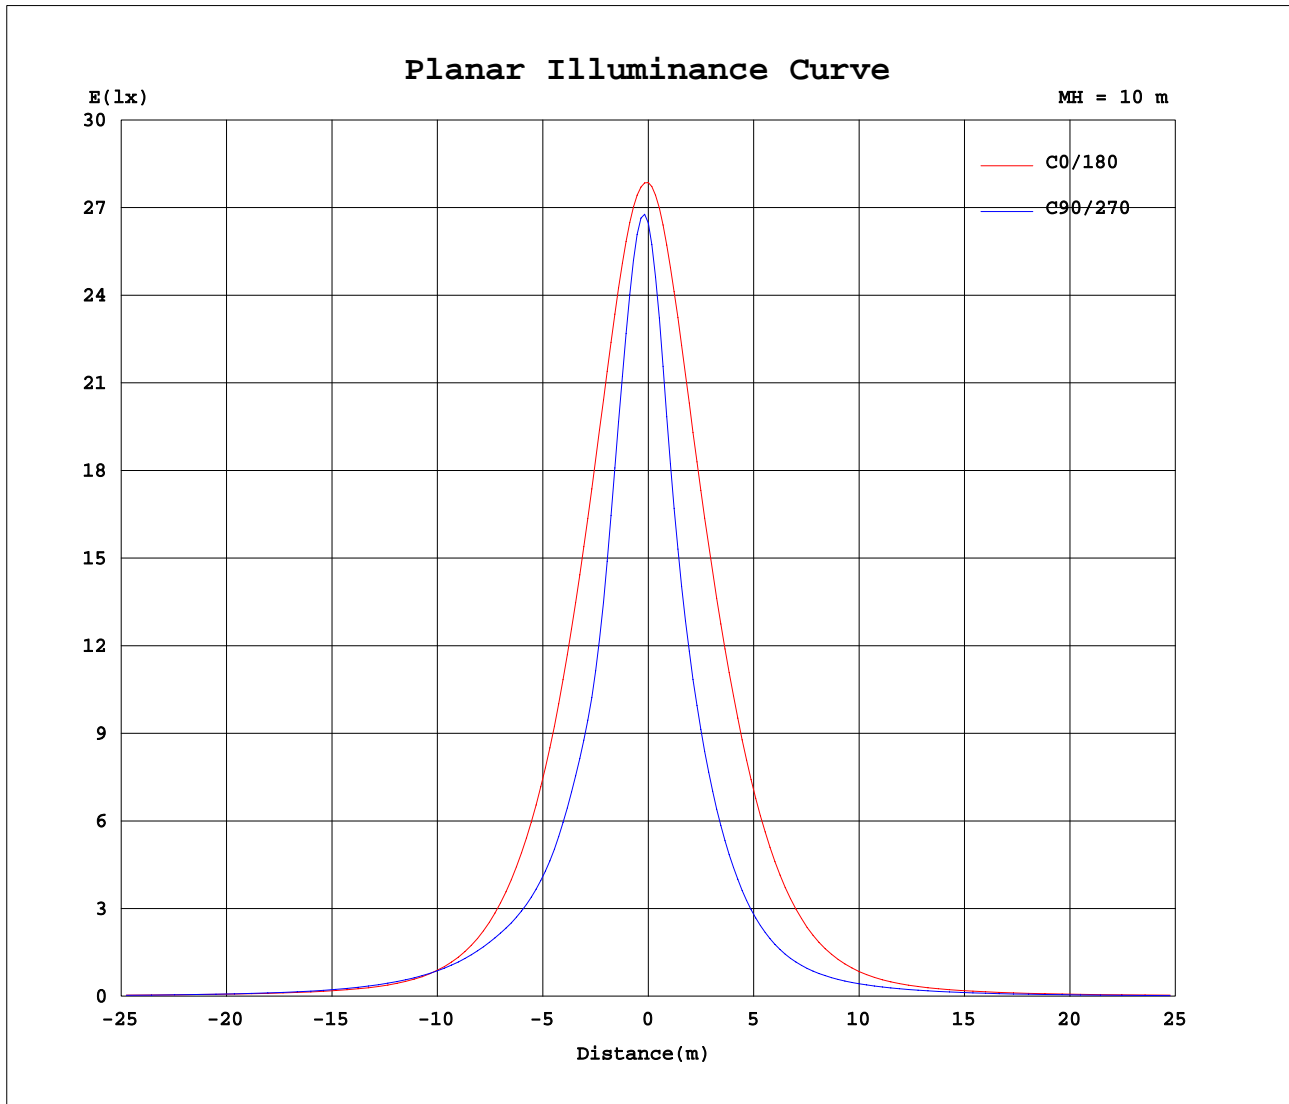

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Sun ren fang
 Test Date: 2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 12.818m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME : LL-F2010T-I-18W-2010TP71000 25x45°	TYPE:IES	WEIGHT:
SPEC.:	DIM.: 1M	SERIAL No.:
MFR.:	SUR.:0.015X1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	2786	2750	2724	2696	2680	2658	2647	2629	2622	2610	2605	2597	2786	2750	2724	2696	2680	2658	2647
5	2679	2685	2638	2581	2507	2467	2430	2441	2450	2488	2498	2487	2602	2482	2355	2210	2111	2024	2007
10	2345	2341	2193	2030	1864	1774	1723	1764	1825	1951	2059	2141	2229	2029	1781	1561	1436	1359	1346
15	1928	1884	1651	1424	1249	1170	1135	1159	1220	1370	1545	1714	1817	1573	1295	1108	1008	940	930
20	1516	1441	1185	995	902	864	842	855	881	951	1109	1317	1434	1180	941	794	709	652	642
25	1143	1057	837	726	668	640	623	635	658	704	784	975	1086	858	673	562	494	450	441
30	835	756	599	538	501	492	485	489	497	526	566	696	785	604	477	395	343	311	304
35	583	524	433	402	390	392	394	391	387	394	416	484	544	418	337	280	241	218	214
40	388	353	313	302	306	314	316	315	307	301	306	332	363	287	239	199	173	160	157
45	253	239	225	228	238	246	247	246	239	230	225	230	240	198	170	145	130	123	122
50	167	167	165	172	182	190	191	190	183	175	167	164	164	143	126	111	103	98.8	97.8
55	120	122	125	131	139	145	145	145	141	135	128	122	120	108	98.3	88.8	84.1	80.4	79.3
60	94.1	93.8	96.9	102	107	109	107	110	109	105	99.8	94.9	95.2	85.7	78.0	71.6	69.7	66.3	65.2
65	80.7	76.9	76.8	79.1	82.7	83.3	80.3	84.1	85.2	82.4	79.0	75.9	79.4	70.1	62.8	58.7	57.6	55.4	54.7
70	79.8	68.1	63.0	63.4	64.6	64.6	62.5	65.1	66.6	65.4	62.8	63.9	75.2	63.1	52.0	48.8	47.7	46.0	45.2
75	83.5	64.7	52.8	51.2	51.7	51.5	50.7	51.9	52.8	51.8	51.1	57.8	77.6	62.3	44.6	40.4	39.3	37.5	36.4
80	79.0	62.2	44.9	41.0	41.1	41.3	41.1	41.8	41.7	41.1	42.2	54.0	73.5	60.3	37.6	32.3	31.1	30.0	29.2
85	57.6	52.8	37.1	32.6	32.1	32.4	32.5	32.9	32.4	32.4	34.1	45.5	53.7	50.5	29.3	24.5	23.5	22.6	22.7
90	16.6	35.7	27.9	24.7	24.4	24.7	24.5	25.0	24.5	24.4	25.4	32.1	18.1	34.5	21.6	18.2	18.2	17.9	18.0
95	2.74	12.3	13.1	13.1	15.6	17.4	18.6	17.1	15.0	12.7	11.8	12.0	1.00	13.3	9.44	10.0	12.7	14.1	15.4
100	1.59	3.84	8.71	11.3	13.3	14.8	15.8	14.4	12.3	10.6	8.30	4.68	1.10	2.54	6.68	8.87	10.8	12.4	13.8
105	1.57	1.58	6.09	9.19	11.7	13.0	13.9	12.5	10.9	8.51	5.89	2.10	1.23	1.57	4.67	7.57	9.98	11.4	12.6
110	1.70	1.62	3.99	7.08	9.47	11.2	11.8	10.9	8.95	6.75	4.02	1.64	1.37	1.50	3.05	6.03	8.59	10.3	10.9
115	1.98	1.83	2.31	5.02	7.36	8.88	9.49	8.79	7.09	5.08	2.45	1.79	1.66	1.65	2.14	4.98	6.97	8.84	9.11
120	2.45	2.21	1.98	3.29	5.33	6.60	7.06	6.60	5.34	3.46	2.03	2.17	2.12	2.13	2.25	3.40	6.06	7.45	7.70
125	3.04	2.77	2.28	2.46	3.67	4.75	5.20	4.79	3.72	2.47	2.25	2.80	2.75	2.81	2.84	3.04	4.65	6.31	6.61
130	3.93	3.55	2.90	2.64	2.89	3.42	3.84	3.46	2.95	2.63	2.89	3.62	3.75	3.80	3.76	3.50	4.07	5.42	5.74
135	5.07	4.61	3.80	3.26	2.99	3.21	3.40	3.27	3.02	3.24	3.81	4.68	5.14	5.18	5.06	4.52	4.54	5.36	5.73
140	6.48	5.97	4.99	4.30	3.80	3.73	3.79	3.85	3.79	4.24	5.12	6.01	6.98	7.00	6.69	6.19	5.62	5.83	6.19
145	8.15	7.66	6.59	5.75	5.11	4.80	4.80	4.94	5.11	5.64	6.81	7.63	9.34	9.31	8.79	8.21	7.45	7.06	7.18
150	10.1	9.73	8.60	7.67	6.89	6.47	6.23	6.63	6.93	7.57	8.72	9.37	12.2	12.1	11.4	10.7	10.3	9.44	9.17
155	12.2	12.1	11.1	10.1	9.23	8.59	8.37	8.85	9.14	9.87	10.6	11.0	15.4	15.2	14.5	13.8	13.5	13.0	12.4
160	14.7	14.8	13.9	13.1	12.2	11.3	10.9	11.5	11.7	12.5	12.6	13.0	18.9	18.4	18.0	17.5	17.0	17.1	16.7
165	17.3	17.4	16.9	16.2	15.3	14.4	14.1	14.2	14.4	14.9	14.7	15.2	22.3	21.7	21.6	21.4	21.3	21.5	21.8
170	20.0	20.2	19.9	19.5	18.7	17.6	17.5	17.2	17.5	17.3	17.0	17.5	25.1	24.2	24.4	24.2	25.0	25.8	26.5
175	23.8	23.3	23.1	23.0	22.3	21.1	21.1	20.9	21.5	20.9	20.8	21.9	26.5	25.5	26.0	25.7	26.6	27.2	28.6
180	26.4	25.9	25.6	25.7	25.6	25.5	26.6	27.3	26.0	25.6	25.2	25.8	26.7	25.7	25.8	25.6	25.8	25.4	26.7

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Sun ren fang
 Test Date:2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.818m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME : LL-F2010T-I-18W-2010TP71000 25x45°	TYPE:IES	WEIGHT:
SPEC.:	DIM.: 1M	SERIAL No.:
MFR.:	SUR.:0.015X1	Shielding Angle:

Table--2

UNIT: cd

C(DEG) γ (DEG)	285	300	315	330	345														
0	2629	2622	2610	2605	2597														
5	2005	2072	2154	2281	2395														
10	1360	1438	1556	1759	1990														
15	945	1012	1113	1296	1556														
20	655	714	799	943	1171														
25	453	498	569	681	856														
30	313	345	399	490	615														
35	219	242	281	346	429														
40	161	175	200	244	294														
45	124	131	147	174	201														
50	99.0	104	112	127	142														
55	80.8	84.3	89.2	97.4	106														
60	66.6	69.8	72.5	77.5	83.6														
65	56.0	58.2	59.2	63.6	70.5														
70	46.7	48.3	47.0	53.1	64.5														
75	37.4	38.5	37.6	43.4	62.5														
80	28.5	29.4	29.4	33.5	58.1														
85	22.0	21.8	21.7	25.6	43.3														
90	17.6	17.3	16.7	18.3	30.6														
95	14.4	13.0	10.4	8.53	8.22														
100	12.8	11.1	9.01	7.00	3.07														
105	11.7	10.2	7.94	5.32	1.96														
110	10.2	8.77	6.65	3.96	1.72														
115	8.66	7.50	5.48	2.97	1.74														
120	7.37	6.19	4.36	2.79	2.17														
125	6.32	5.13	3.97	3.04	2.76														
130	5.52	4.87	4.05	3.64	3.64														
135	5.46	5.10	4.64	4.73	4.86														
140	6.01	5.86	5.79	6.27	6.52														
145	7.13	7.22	7.60	8.26	8.65														
150	9.28	9.53	10.1	10.8	11.3														
155	12.4	12.6	13.3	13.9	14.2														
160	16.5	16.5	17.2	17.4	17.4														
165	21.3	20.8	21.2	20.9	20.7														
170	25.8	25.1	24.6	23.9	23.8														
175	27.7	27.0	26.2	25.6	25.4														
180	27.2	26.2	25.6	25.3	25.8														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Sun ren fang
 Test Date:2021-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.818m [K=1.0000]
 Remarks: