
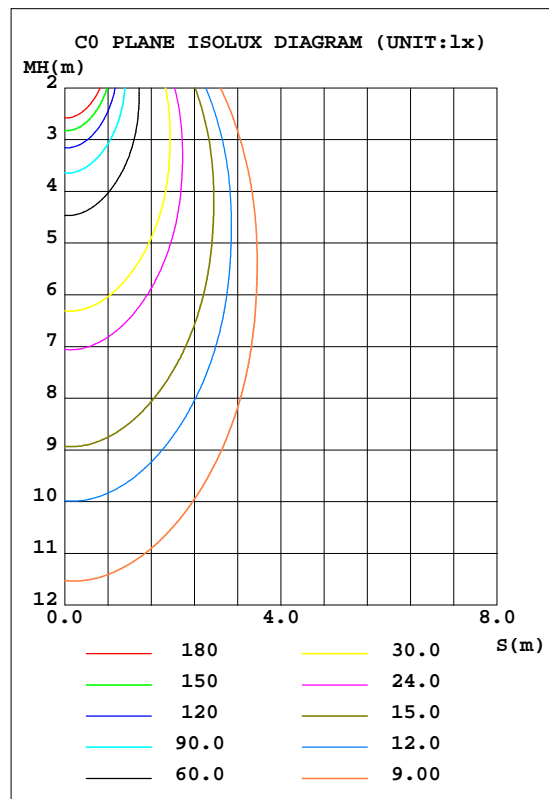


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	5050	I _{max} (cd)	1195	S/MH(C0/180)	0.75
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	0.76
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1677.2	h UP, DN(C0-180)	3.0,49.1
NOMINAL FLUX(lm)	59.8984	CIE CLASS	DIRECT	h UP, DN(C180-360)	2.9,45.1
LAMPS INSIDE	28	h up(%)	5.8	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	24	h down(%)	94.2	CIBSE SHR MAX	0.90

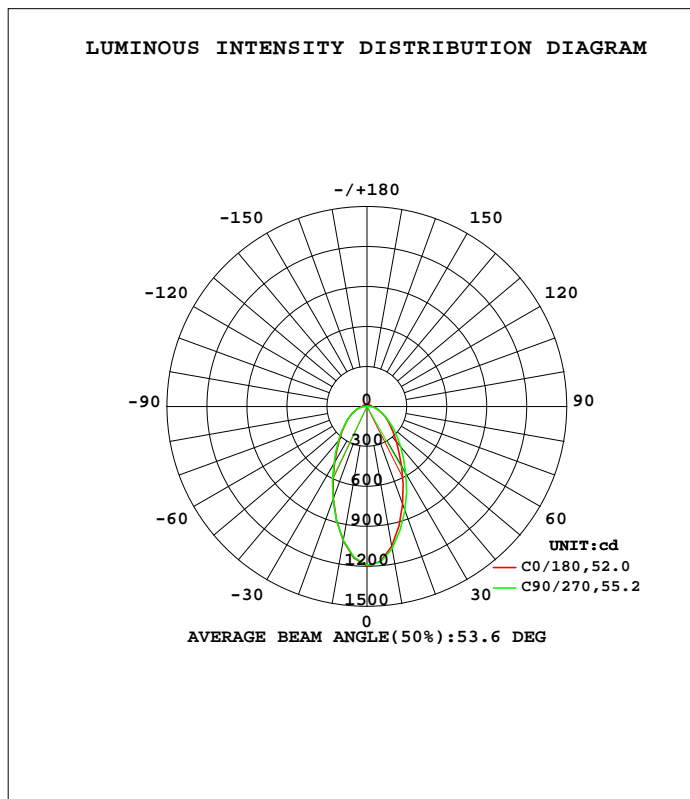

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:
 Test Date:2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:7.100m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1065	1088	1086	1047	1025	1011	1023	1042	0- 10	106.6	106.6	6.36,6.36
20	784.2	825.5	835.0	778.6	740.0	731.1	748.0	765.3	10- 20	255.8	362.4	21.6,21.6
30	520.7	567.4	583.8	526.7	486.3	481.4	498.8	507.3	20- 30	295.2	657.6	39.2,39.2
40	345.9	381.2	394.7	352.2	323.9	323.2	335.0	339.0	30- 40	268.2	925.8	55.2,55.2
50	233.9	253.4	260.6	234.3	218.3	218.8	225.4	218.9	40- 50	222.1	1148	68.4,68.4
60	161.9	168.9	166.7	155.9	149.9	148.0	149.6	149.3	50- 60	172.8	1321	78.7,78.7
70	107.1	106.8	100.1	98.66	98.80	95.37	93.22	98.23	60- 70	125.1	1446	86.2,86.2
80	66.50	65.22	59.89	60.14	60.34	58.72	55.49	59.81	70- 80	83.84	1530	91.2,91.2
90	37.23	35.70	11.53	33.13	34.33	32.84	6.468	35.09	80- 90	49.72	1579	94.2,94.2
100	32.09	26.37	2.527	25.69	31.69	25.07	2.328	25.45	90-100	27.57	1607	95.8,95.8
110	30.28	18.73	3.346	18.60	29.65	17.59	3.268	16.86	100-110	20.27	1627	97,97
120	24.65	10.43	4.520	12.73	23.77	11.81	4.501	10.33	110-120	14.98	1642	97.9,97.9
130	16.93	8.398	5.957	10.21	16.29	9.724	5.934	8.389	120-130	10.45	1653	98.5,98.5
140	13.17	9.019	7.616	10.98	12.78	10.42	7.563	9.142	130-140	7.790	1660	99,99
150	13.40	10.19	9.295	11.99	13.11	11.29	9.227	10.42	140-150	6.671	1667	99.4,99.4
160	12.63	11.22	10.66	12.62	12.62	11.94	10.66	11.71	150-160	5.351	1672	99.7,99.7
170	12.99	11.90	11.76	12.91	12.87	12.23	11.79	12.50	160-170	3.464	1676	99.9,99.9
180	13.12	12.36	12.43	13.01	13.14	12.40	12.43	13.03	170-180	1.212	1677	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:
 Test Date:2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:7.100m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

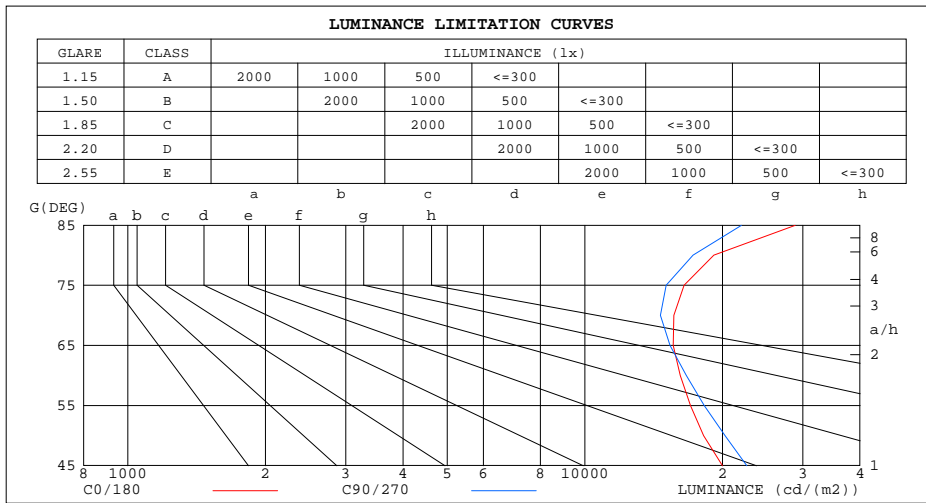

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	28841	22022
80	19149	17245
75	16487	15079
70	15662	14637
65	15620	15361
60	16187	16668
55	17031	18247
50	18193	20268
45	20019	22604


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 28DEG
 Operators:
 Test Date: 2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 65.0%
 Test Distance: 7.100m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.94
1.0	1.04	.90	.96	1.01	.97	.94	.96	.93	.90	.91	.89	.86	.86	.85	.83	.80
2.0	.92	.86	.81	.90	.84	.80	.86	.81	.77	.81	.78	.74	.78	.75	.72	.70
3.0	.83	.75	.70	.81	.74	.69	.77	.71	.67	.74	.69	.65	.70	.67	.63	.61
4.0	.75	.67	.61	.73	.66	.60	.70	.64	.59	.67	.62	.58	.64	.60	.56	.54
5.0	.68	.60	.54	.67	.59	.54	.64	.57	.53	.61	.56	.51	.59	.54	.50	.48
6.0	.62	.54	.49	.61	.54	.48	.59	.52	.47	.57	.51	.47	.55	.50	.46	.44
7.0	.57	.50	.44	.56	.49	.44	.54	.48	.43	.53	.47	.42	.51	.46	.42	.40
8.0	.53	.45	.40	.52	.45	.40	.51	.44	.39	.49	.43	.39	.47	.42	.38	.36
9.0	.49	.42	.37	.49	.42	.37	.47	.41	.36	.46	.40	.36	.44	.39	.35	.34
10.0	.46	.39	.34	.45	.39	.34	.44	.38	.34	.43	.37	.33	.42	.37	.33	.31

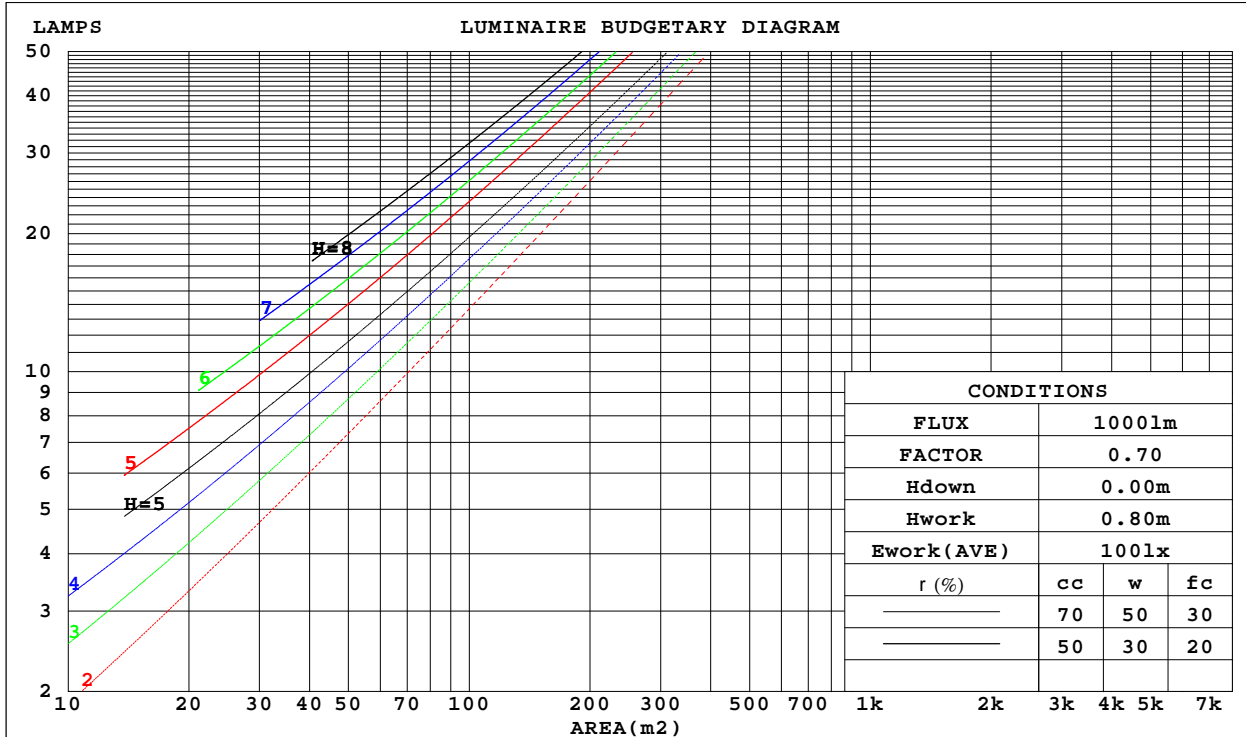

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:
 Test Date:2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:7.100m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.285	.162	.051	.276	.157	.050	.259	.149	.048	.244	.141	.045	.230	.134	.043	
2.0	.260	.143	.044	.253	.139	.043	.238	.132	.041	.225	.126	.039	.212	.120	.038	
3.0	.239	.127	.038	.232	.124	.037	.219	.119	.036	.207	.114	.035	.196	.109	.034	
4.0	.220	.115	.034	.214	.112	.033	.203	.108	.032	.192	.103	.031	.182	.099	.030	
5.0	.204	.104	.030	.199	.102	.030	.189	.098	.029	.179	.094	.028	.170	.091	.027	
6.0	.190	.095	.027	.185	.094	.027	.176	.090	.026	.167	.087	.026	.159	.084	.025	
7.0	.178	.088	.025	.173	.086	.025	.165	.083	.024	.157	.081	.023	.150	.078	.023	
8.0	.167	.081	.023	.163	.080	.023	.155	.077	.022	.148	.075	.022	.141	.073	.021	
9.0	.157	.076	.021	.153	.075	.021	.146	.072	.021	.140	.070	.020	.134	.068	.020	
10.0	.148	.071	.020	.145	.070	.019	.138	.068	.019	.133	.066	.019	.127	.064	.018	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.235	.235	.235	.201	.201	.201	.137	.137	.137	.079	.079	.079	.025	.025	.025	
1.0	.223	.201	.181	.191	.173	.156	.131	.119	.108	.075	.069	.063	.024	.022	.020	
2.0	.213	.177	.147	.183	.152	.127	.125	.105	.089	.072	.061	.052	.023	.020	.017	
3.0	.204	.159	.124	.175	.138	.108	.120	.096	.075	.069	.056	.044	.022	.018	.015	
4.0	.195	.146	.108	.168	.126	.094	.115	.088	.066	.067	.051	.039	.021	.017	.013	
5.0	.187	.135	.097	.161	.117	.084	.111	.082	.059	.064	.048	.035	.021	.016	.012	
6.0	.180	.127	.088	.155	.110	.077	.107	.077	.054	.062	.045	.032	.020	.015	.011	
7.0	.173	.120	.082	.149	.104	.071	.103	.073	.051	.060	.043	.030	.019	.014	.010	
8.0	.167	.114	.077	.144	.099	.067	.100	.069	.048	.058	.041	.028	.019	.013	.009	
9.0	.161	.109	.073	.139	.094	.064	.096	.066	.045	.056	.039	.027	.018	.013	.009	
10.0	.156	.105	.070	.134	.091	.061	.093	.064	.044	.054	.038	.026	.018	.012	.009	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:
 Test Date:2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:7.100m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm										
NAME: LL-F2010T-I-RGBW-24W					TYPE: LED WallWasher Strip			WEIGHT: 0.12KG		
SPEC.: 20*10					DIM.: 1000*20*10			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.7	21.0	20.0	21.2	21.5	20.0	21.3	20.4	21.6	21.9
3H	21.1	22.3	21.5	22.6	22.9	21.2	22.4	21.6	22.7	23.0
4H	21.8	22.9	22.2	23.3	23.6	21.8	22.9	22.2	23.3	23.6
6H	22.6	23.6	23.0	24.0	24.4	22.5	23.5	22.9	23.9	24.3
8H	22.9	24.0	23.4	24.3	24.7	22.8	23.8	23.2	24.2	24.6
12H	23.4	24.4	23.8	24.7	25.2	23.1	24.1	23.6	24.5	24.9
4H 2H	20.2	21.3	20.6	21.7	22.0	20.5	21.6	20.8	21.9	22.3
3H	21.8	22.8	22.3	23.2	23.6	21.9	22.9	22.3	23.2	23.7
4H	22.7	23.6	23.2	24.0	24.5	22.7	23.6	23.1	24.0	24.4
6H	23.7	24.4	24.1	24.9	25.4	23.5	24.3	24.0	24.8	25.3
8H	24.1	24.9	24.6	25.3	25.8	24.0	24.7	24.5	25.2	25.7
12H	24.7	25.4	25.2	25.9	26.4	24.4	25.1	24.9	25.6	26.1
8H 4H	23.1	23.8	23.6	24.3	24.8	23.0	23.7	23.5	24.2	24.7
6H	24.2	24.8	24.7	25.3	25.9	24.1	24.7	24.6	25.2	25.8
8H	24.9	25.4	25.4	25.9	26.5	24.8	25.3	25.3	25.8	26.4
12H	25.6	26.1	26.2	26.6	27.2	25.4	25.8	25.9	26.4	27.0
12H 4H	23.1	23.8	23.6	24.3	24.8	23.1	23.7	23.6	24.2	24.7
6H	24.4	24.9	24.9	25.4	26.0	24.3	24.8	24.8	25.3	25.9
8H	25.1	25.6	25.7	26.1	26.7	25.0	25.5	25.6	26.0	26.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				

CIE Pub.117, 1677 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.8)
Area: 0.02 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:28DEG
Operators:
Test Date:2021-11-01

g Range: 0 - 180DEG
g Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:65.0%
Test Distance:7.100m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	54	48	63	53	47	62	53	47	42
0.80	73	63	56	72	62	56	70	61	56	49
1.00	80	70	64	79	70	64	76	70	63	56
1.25	86	77	71	85	76	70	82	74	69	62
1.50	91	82	75	89	81	75	85	78	73	66
2.00	96	88	83	94	87	82	90	84	80	71
2.50	100	92	87	97	91	86	93	87	83	74
3.00	102	96	91	100	94	89	95	91	87	77
4.00	106	100	96	103	98	94	98	94	91	81
5.00	108	103	100	105	101	98	100	97	94	83
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:
 Test Date:2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:7.100m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

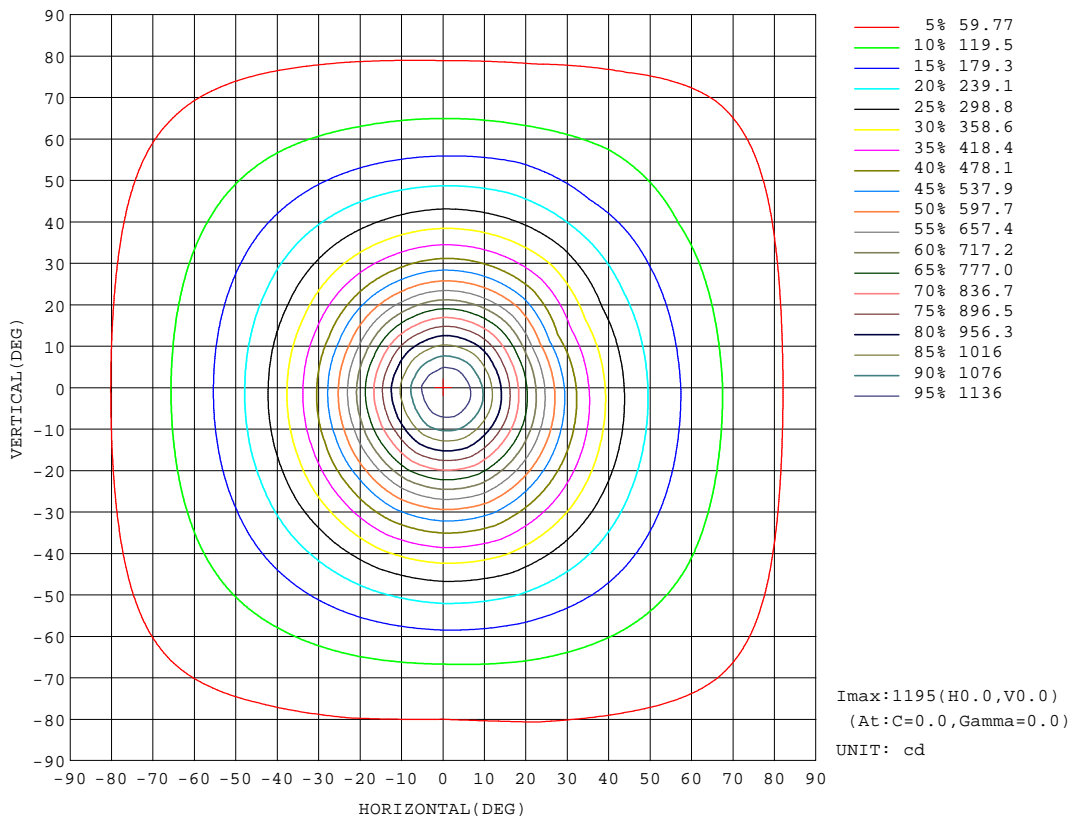


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:
 Test Date:2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:7.100m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Flux out:657.6 lm

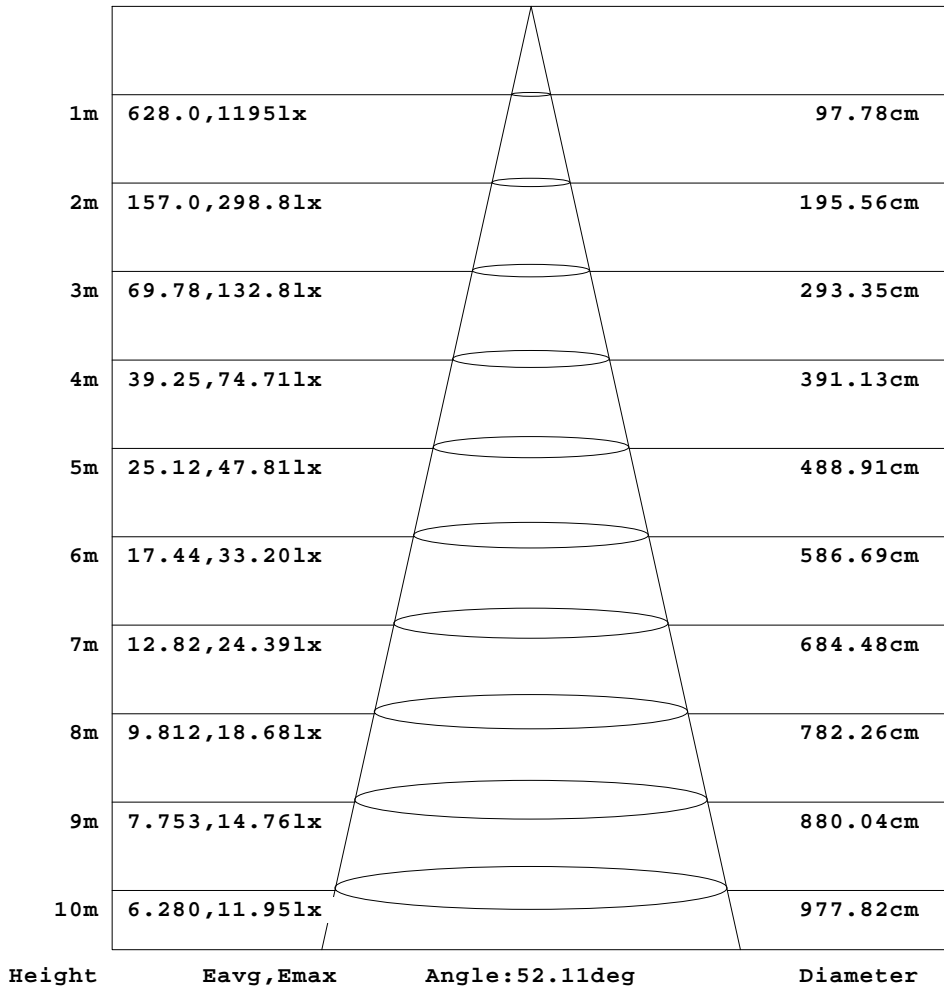


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:28DEG
Operators:
Test Date:2021-11-01

g Range: 0 - 180DEG
g Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:65.0%
Test Distance:7.100m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

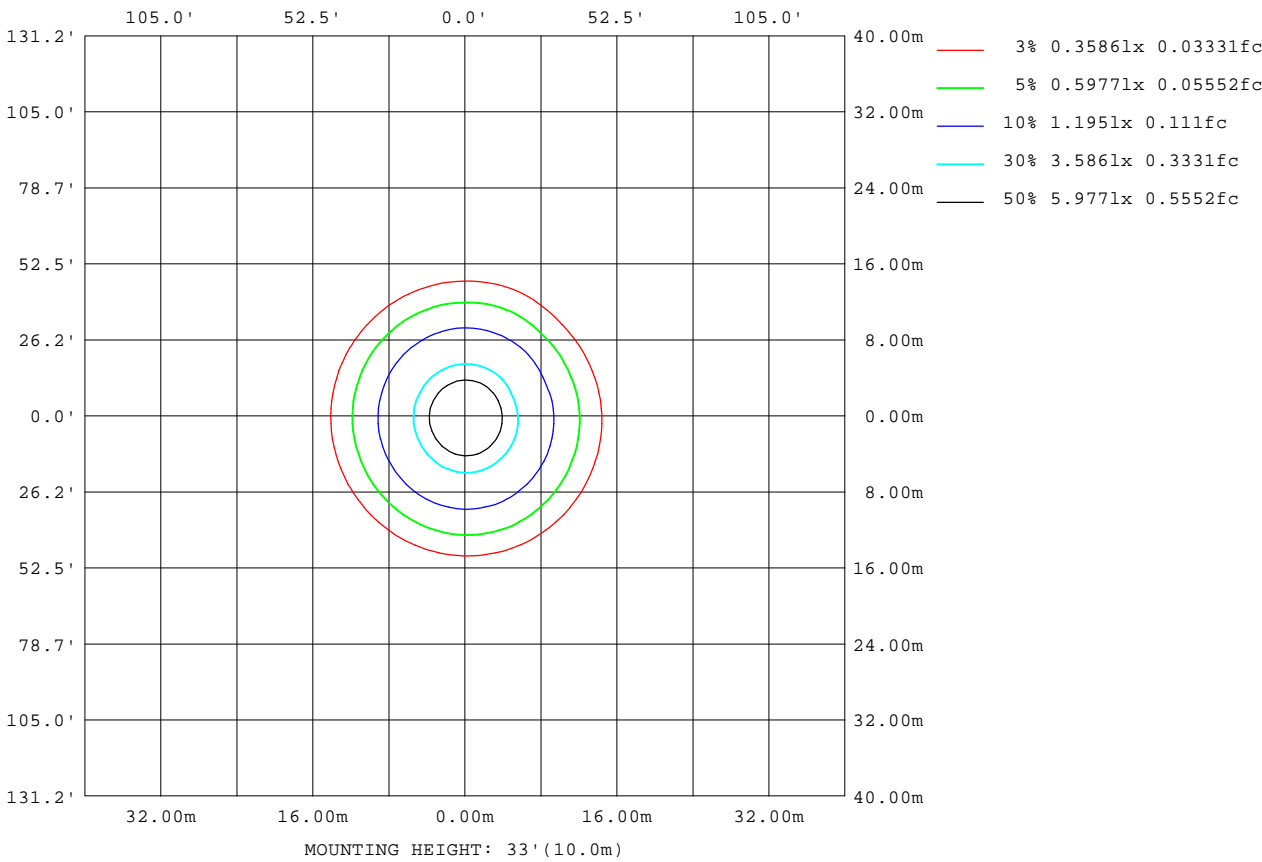

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators:
Test Date: 2021-11-01

g Range: 0 - 180DEG
g Interval: 5.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 65.0%
Test Distance: 7.100m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	15063
L_0~180(75)av	15794
L_0~180(85)av	27408
L_90~270(65)av	14716
L_90~270(75)av	14698
L_90~270(85)av	20771
L_45(65)av	14828
L_45(75)av	15233
L_45(85)av	26707

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:
 Test Date:2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:7.100m [K=1.0000]
 Remarks:

Planar Illuminance Curve

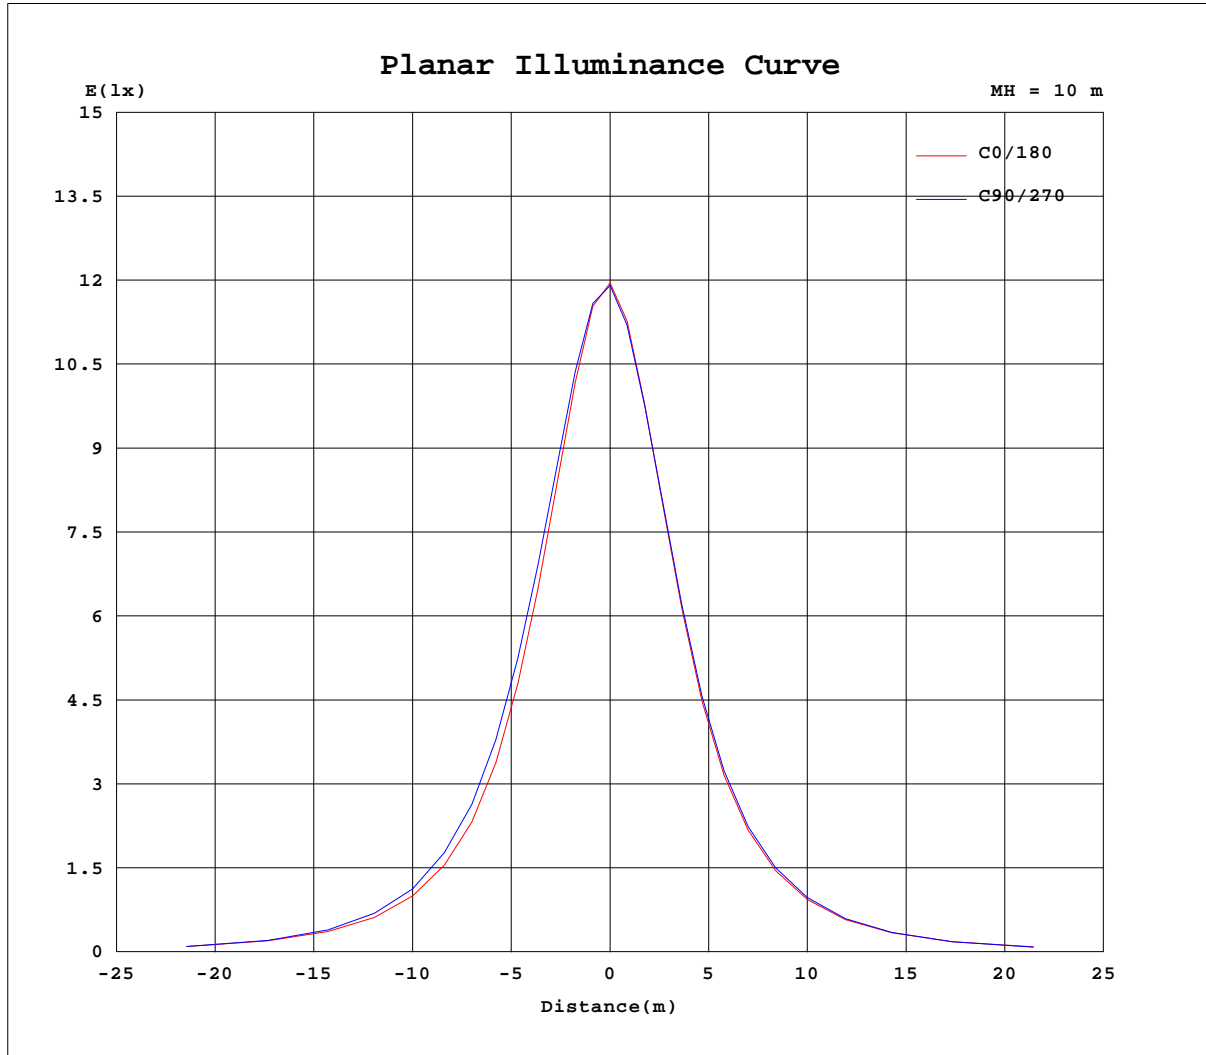

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 28DEG
 Operators:
 Test Date: 2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 65.0%
 Test Distance: 7.100m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:1.0000A P:24.000W PF:1.0000 Freq:1.000Hz Lamp Flux:59.8984x28 lm		
NAME: LL-F2010T-I-RGBW-24W	TYPE: LED WallWasher Strip	WEIGHT: 0.12KG
SPEC.: 20*10	DIM.: 1000*20*10	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1195	1194	1193	1191	1191	1189	1187	1186	1195	1194	1193	1191	1191	1189	1187	1186			
5	1167	1175	1176	1177	1172	1164	1149	1140	1140	1130	1128	1126	1133	1137	1147	1153			
10	1065	1082	1088	1095	1086	1073	1047	1029	1025	1010	1011	1011	1023	1028	1042	1048			
15	929	949	959	972	964	949	915	893	885	871	875	876	890	895	908	911			
20	784	808	825	843	835	817	779	752	740	726	731	734	748	754	765	763			
25	645	670	692	712	706	686	646	617	603	590	596	601	614	619	627	614			
30	521	545	567	589	584	565	527	500	486	476	481	487	499	502	507	483			
35	422	443	464	484	480	463	430	408	396	389	394	399	408	410	413	395			
40	346	363	381	398	395	379	352	333	324	318	323	327	335	337	339	325			
45	283	296	310	324	320	308	287	273	266	262	267	269	276	277	277	269			
50	234	242	253	264	261	249	234	223	218	217	219	223	225	229	219	222			
55	195	201	208	212	209	202	192	185	182	181	181	183	185	189	179	186			
60	162	165	169	170	167	162	156	152	150	149	148	148	150	153	149	147			
65	132	134	135	134	130	128	125	124	123	120	120	118	119	119	122	120			
70	107	109	107	105	100	100	98.7	99.3	98.8	96.7	95.4	93.0	93.2	88.1	98.2	94.3			
75	85.3	85.8	83.5	82.0	78.1	78.5	77.4	78.4	78.2	76.2	75.7	74.3	74.1	70.3	78.8	82.8			
80	66.5	66.6	65.2	64.2	59.9	61.3	60.1	60.6	60.3	59.1	58.7	57.7	55.5	56.9	59.8	64.7			
85	50.3	50.5	49.1	48.8	38.4	46.4	45.1	46.0	45.3	44.6	44.2	43.6	34.0	40.6	47.8	49.3			
90	37.2	37.4	35.7	33.3	11.5	31.1	33.1	34.8	34.3	34.1	32.8	28.7	6.47	30.8	35.1	36.7			
95	32.5	31.8	29.3	21.7	2.17	20.3	28.6	31.8	31.8	31.5	28.5	18.3	1.95	19.6	28.8	31.7			
100	32.1	30.9	26.4	13.1	2.53	12.4	25.7	31.2	31.7	30.5	25.1	11.0	2.33	11.4	25.5	30.8			
105	31.6	29.7	22.6	8.17	2.96	8.19	22.2	30.0	31.1	29.0	21.4	7.40	2.75	7.23	21.6	29.5			
110	30.3	27.7	18.7	5.89	3.35	6.39	18.6	28.0	29.6	26.7	17.6	6.12	3.27	5.48	16.9	27.7			
115	27.9	24.8	13.7	5.48	3.89	6.18	15.4	25.1	27.1	23.5	14.3	5.99	3.86	5.28	13.0	25.0			
120	24.6	21.3	10.4	5.76	4.52	6.61	12.7	21.8	23.8	20.0	11.8	6.34	4.50	5.58	10.3	21.3			
125	20.9	16.3	8.74	6.20	5.21	7.17	10.8	18.4	20.0	16.5	10.2	6.86	5.20	6.11	8.61	16.7			
130	16.9	12.4	8.40	6.75	5.96	7.75	10.2	15.3	16.3	13.5	9.72	7.42	5.93	6.69	8.39	13.4			
135	14.0	10.8	8.52	7.40	6.74	8.36	10.4	13.7	13.7	12.0	9.97	8.01	6.72	7.42	8.63	11.8			
140	13.2	10.6	9.02	8.12	7.62	9.00	11.0	13.3	12.8	11.7	10.4	8.64	7.56	8.16	9.14	11.7			
145	13.1	10.9	9.63	8.88	8.52	9.72	11.5	13.3	12.9	12.1	10.9	9.30	8.41	8.91	9.79	12.2			
150	13.4	11.3	10.2	9.62	9.30	10.4	12.0	13.4	13.1	12.4	11.3	9.95	9.23	9.71	10.4	12.7			
155	13.6	11.6	10.7	10.3	10.0	10.9	12.3	13.6	13.3	12.7	11.6	10.5	9.98	10.4	11.1	13.3			
160	12.6	11.8	11.2	10.8	10.7	11.4	12.6	14.0	12.6	12.8	11.9	11.0	10.7	11.0	11.7	13.7			
165	12.9	12.0	11.6	11.3	11.2	11.8	12.8	14.4	12.8	12.8	12.1	11.5	11.3	11.5	12.2	14.0			
170	13.0	12.3	11.9	11.7	11.8	12.2	12.9	14.6	12.9	12.8	12.2	11.8	11.8	12.0	12.5	14.3			
175	13.0	12.6	12.1	12.1	12.2	12.5	12.9	14.7	12.9	12.7	12.3	12.1	12.2	12.3	12.8	14.5			
180	13.1	12.8	12.4	12.4	12.4	12.6	13.0	14.6	13.1	12.8	12.4	12.4	12.4	12.6	13.0	14.8			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:
 Test Date:2021-11-01

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:65.0%
 Test Distance:7.100m [K=1.0000]
 Remarks: