

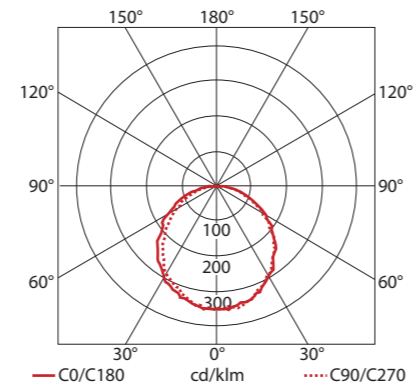


Ground Linear Light LL-G19-12W

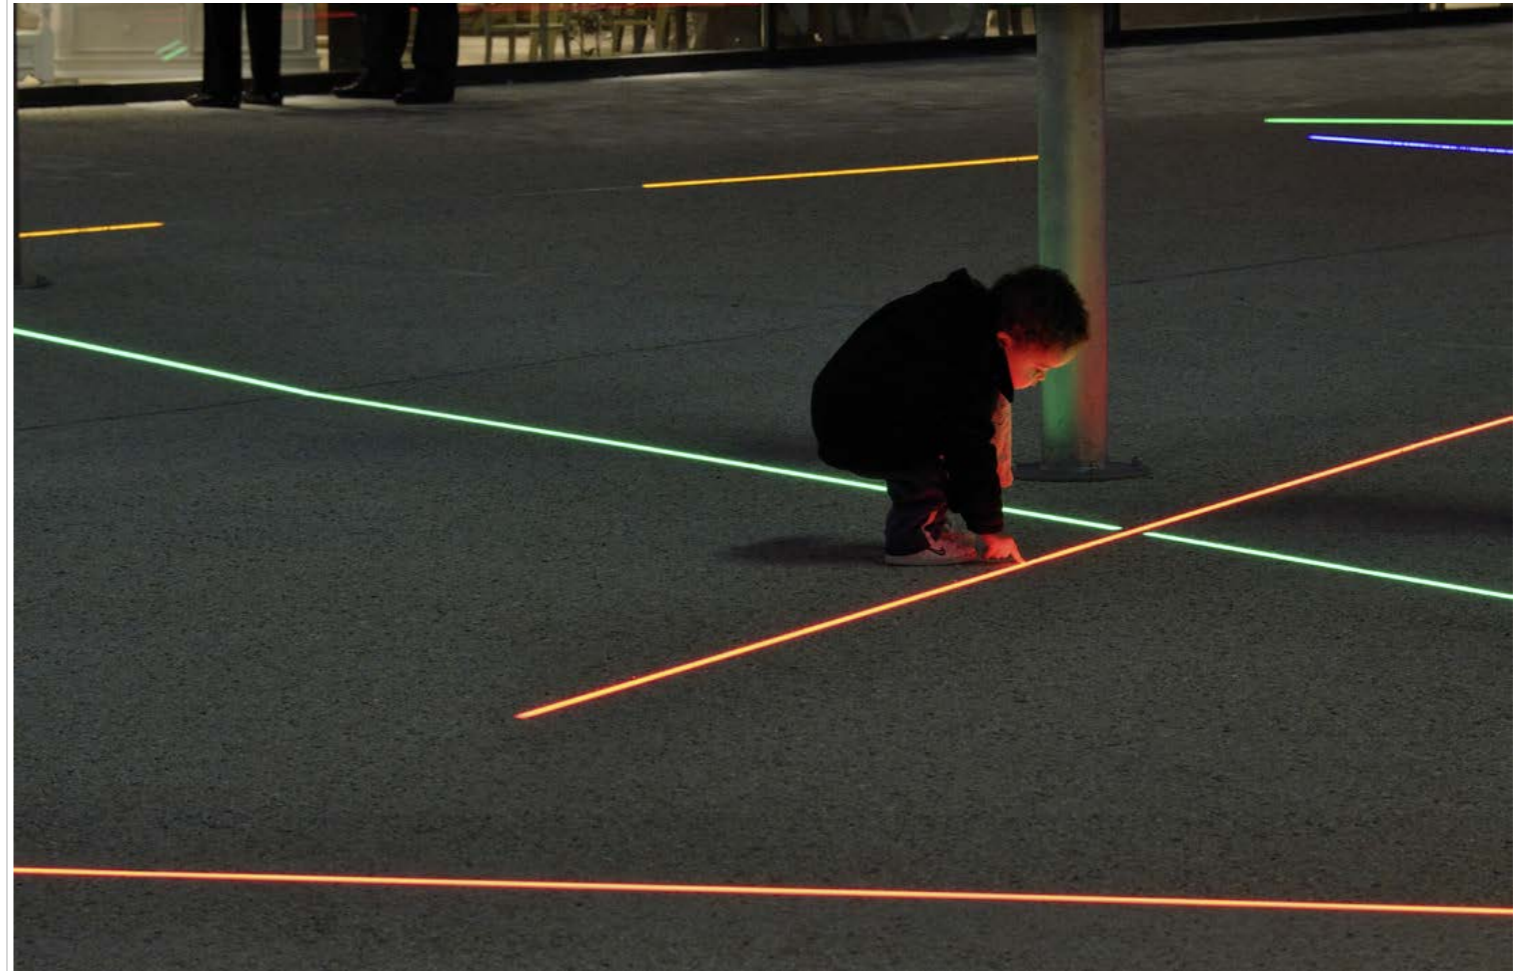

24V DC 12 W/m 15 lm/W IP67 Intertek CE

- Luminous flux:** 180lm/m nominal (@ 3000K)
- Size:** H72/W19/L100-1000mm
- Chip:** Cree/Osram/Epistar
- Beam angle:** Difused (110°)
- CRI:** ≥ 80
- Lifetime:** 50,000 hours @ 25°C
- Operating temp:** T_a = -25 to 50°C (T_c max = 60°C)
- IP rating:** IP67
- Finish:** Silver anodised
- Cover/Lens:** Diffused
- Mounting:** Recessed (no flange)
- Connection:** Hardwire tails
- Control:** 1-10V/DMX / Dali (see visDIM range)

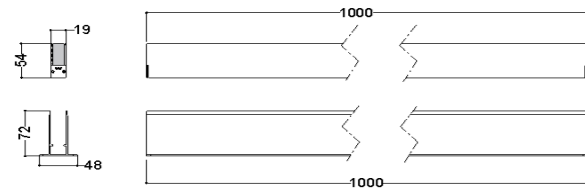

- Ultra-slim linear discreet marker light designed to be inset into ground and architectural features.
- Compact body made of tempered mat glass and aluminum alloy.
- Low output produces sharp visual line of light.
- Full end to end diffusion enables continuous homogeneous runs without shadowing.
- White: 2700K/3000K/4000K.
- **Please Note.** Luminaires must not be used for installation in road lanes where the light fixtures exposed to a horizontal strain due to cars or other heavy vehicles drive over, but walk over or shopping carts is no problem.